


# 3/4" DOOR FRAME



- Compliant with the new 3/4" and 3" rule.
- Standard sizes from 2'-4" X 6'-8" to 3' X 8'.
- Available in left or right hand opening.
- Recessed hinge mounts manufactured into door frame.
- Hinge, roller catch and door pull finish options; Brushed Nickel, Brushed Brass, and Oil Rubbed Bronze.
- SMARTLOCK and Honeywell RDI compatibility.
- Finished frame hoistway allows great look with no need for trim.
- Custom sizes and fire ratings may be available upon request.

3/4" from door to hoistway wall.

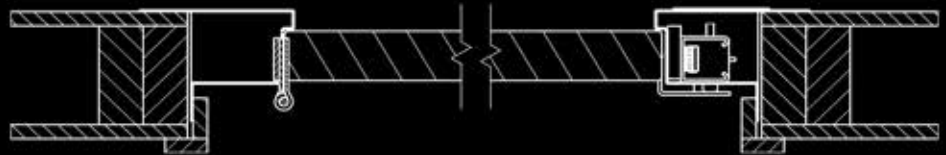

1-3/4" thick door.

\* Door provided by others.



**ROCKY MOUNTAIN  
ELEVATOR PRODUCTS**  
LIVE LIFE ELEVATED



416 29 Road, Grand Junction, CO 81504 (970)-242-2544  
[WWW.ROCKYMOUNTAINELEVATORPRODUCTS.COM](http://WWW.ROCKYMOUNTAINELEVATORPRODUCTS.COM)

# 2016 CODE COMPLIANT 3/4" DOOR FRAME

## METAL DOOR FRAME WITH INTERGRATED LOCK

### 2016 CODE COMPLIANT

- **Easy Compliance with 5.3.1.7.2 and 5.3.1.8.3 Clearance Between hoistway Doors and Landing Sills. Distance between the Hoistway face of the Hoistway doors and the Hoistway edge of the landing sill shall not exceed 19 mm (0.75 in) for swinging doors and 57 mm (2.25 in) for sliding doors.**

### COMPATIBILITY

- **COMPATABLE WITH RMEP SMARTLOCK AND HONEYWELL RDI LOCKS.**

### EASY INSTALLATION

- **STANDARD AND CUSTOM SIZES AVAILABLE**
- **INSTALLS INSIDE HOISTWAY.**
- **NO TRIM.**
- **FITS ANY WALL DEPTH.**



**ROCKY MOUNTAIN  
ELEVATOR PRODUCTS**  
LIVE LIFE ELEVATED

